

Anchor channel HAC-40



Base materials

- Concrete (cracked)
- Concrete (uncracked)

Applications

- Fastening curtain wall brackets
- Fastening guide rails for elevators and counterweights
- Fastening sliding door mechanisms for elevators

Advantages

- Innovative V-shape provides high load resistance and close edge distances
- New type of protective, environmentally friendly foam insert (LDPE) and end caps seal the channel effectively, preventing concrete slurry from entering the channel
- Foam insert features tear-out strip for trouble-free removal (avoids damage to the channel through use of drill bits, hammers or gas torches)


Technical data

| | |
|----------------------------|---|
| Anchor type | Anchor channel |
| Material, corrosion | Steel, sherardized / hot-dip galvanized |
| Width | 41 mm |
| Height | 28 mm |

Approvals

| | |
|-----------------|--|
| ETA | ETA-11/0006 for HAC (ETAG -, Option -) |
| Fire resistance | |
| Fatigue | |

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

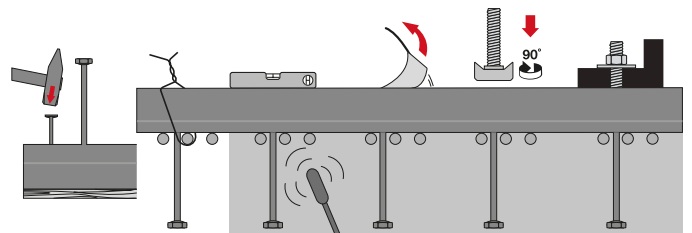

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

| Ordering designation | Length | Number of anchors | Anchor distance | Sales pack quantity | Item number |
|----------------------|--------|-------------------|-----------------|---------------------|----------------------|
| HAC-40 91/200 F | 200 mm | 2 | 150 mm | 1 pc | 431906 ¹⁾ |
| HAC-40 91/250 F | 250 mm | 2 | 200 mm | 1 pc | 431907 ¹⁾ |
| HAC-40 91/300 F | 300 mm | 2 | 250 mm | 1 pc | 431908 ¹⁾ |
| HAC-40 91/350 F | 350 mm | 3 | 150 mm | 1 pc | 431909 ¹⁾ |
| HAC-40 91/450 F | 450 mm | 3 | 200 mm | 1 pc | 431910 ¹⁾ |
| HAC-40 91/550 F | 550 mm | 3 | 250 mm | 1 pc | 431911 ¹⁾ |

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.