


T-head bolt (galvanized) HBC-C-E

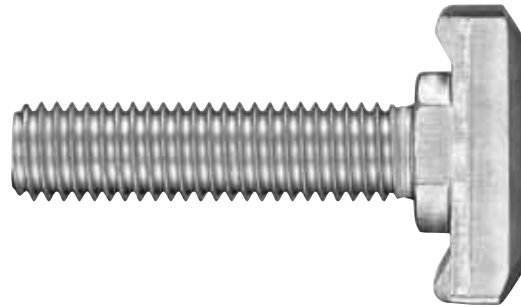

Applications

- Special geometry for elevator applications
For use with HAC-40 to HAC-70 anchor channels

Advantages

- Simplification of the available range Only one universal bolt type needed to cover HAC-40 to HAC-70 anchor channel
- Dustless, low-noise fastening method
- European approval in accordance with the latest technical specifications



Technical data

Anchor type	T-head bolt
Material, corrosion	Steel, zinc-plated

Approvals

ETA Fire resistance Fatigue	ETA-11/0006 for HAC (ETAG -, Option -)
-----------------------------------	--

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

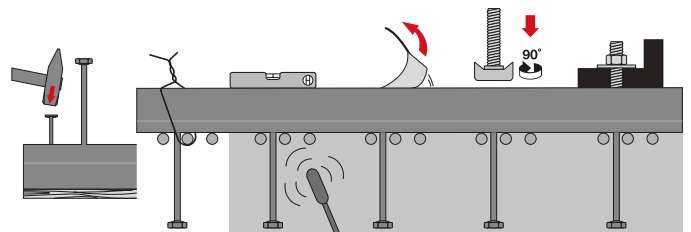

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Sales pack quantity	Item number
HBC-C-E M12x60 8.8G	100 pc	433540¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.