

T-head bolt hot-dip galvanized (HDG) incl. hex nut HBC-C-N 8.8



Applications

- For use with HAC-40 to HAC-70 anchor channels

Advantages

- Simplification of the available range Only one universal bolt type needed to cover HAC-40 to HAC-70 anchor channel
- Toothed bolts for reliable load transfer in a longitudinal direction
- Dustless, low-noise fastening method


Technical data

Anchor type	T-head bolt
Material, corrosion	Steel, sherardized / hot-dip galvanized

Approvals

ETA	ETA-11/0006 for HAC (ETAG -, Option -)
Fire resistance	
Fatigue	

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

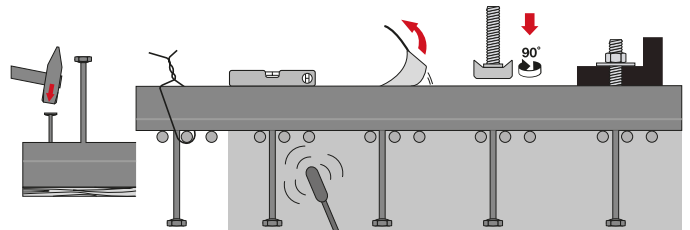

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Sales pack quantity	Item number
HBC-C-N M16x50 8.8F	100 pc	433478 ¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.