

Light-duty anchor HLD



Base materials

- Concrete (uncracked)
- Drywall
- Masonry (hollow)

Applications


- Fastening on low-strength materials with cavities - for use with standard wood screws
- Anchoring in perforated brick or block, drywall, concrete

Advantages

- The wings spring out and adapt to all materials
- Allows flexibility when selecting screws
- Ribs on the body help prevent the anchor spinning during installation

Technical data

Material composition	Polyamide PA 6
Head configuration	Flat head, Round head
Anchor size	10 mm

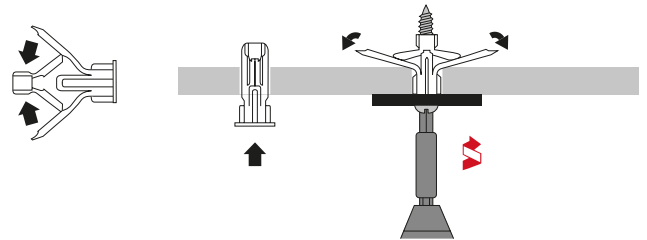

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Anchor length	Sales pack quantity	Item number
HLD 3	10 mm	25 mm	100 pc	335507
HLD 2	10 mm	28 mm	150 pc	335506
HLD 4	10 mm	44 mm	100 pc	335508

Please visit our website for the latest item numbers and related products.