

A4 316 Equivalent Corrosion Resistance

S-BT-GR M8/7 SN 6 HL

	SBT 4	SBT 6 SF 6
	TS-BT 5.3-95 S	
	S-DG BT M8/7 Short 6	
	Torque Tool S-BT 1/4" 16 Nm / 11.8 lb-ft	
	S-NS 13 C 95/3 3/4"	
	S-CC BT 6	

1

SBT 4
SBT 6
SF 6

2

3

4

5

SBT 4
SBT 6
SF 6

6

1 → 2 click

7

8a

8b

8c

S-DG BT M8/7 Short 6

8d

9

10

1.6-7 mm
1/16 - 9/32"

$\varnothing \ge 13\text{ mm}$
1/2"

11a

16Nm
11.8 ft-lb

1 ↓ 2 3 click

12b

SBT 6 SF 6




12c

$\le 16\text{ Nm}$
11.8 ft-lb

X-FCM-F/R
X-FCM-F/R NG
X-FCM-F/R HL

CE

23
Hilti Corporation,
Feldkircherstrasse 100,
FL-9494 Schaan, Liechtenstein
Hilti-SF-DoP-044
ETA-23/0001
EAD 333037-00-0602
0672-CPR
Threaded studs for connection of materials to structural steel and aluminium members
www.hilti.group

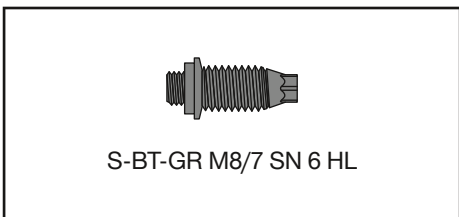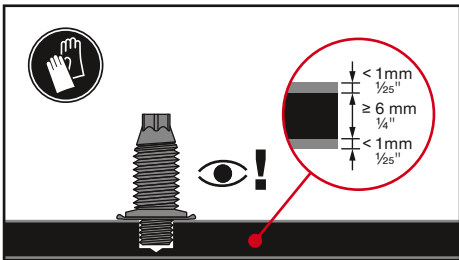

	SBT 6
	TS-BT 5.3-95 S
	S-SH BT M8
	Torque Tool S-BT 1/4" 16 Nm / 11.8 lb-ft
	S-NS 13 C 95/3 1/4"
	S-IC BT

